

**MSensor G3 PIR 5DPI**

DALI-2 multi-sensor

**Product description**

- \_ Sensor developed to work with the latest DALI specification
- \_ Monitoring of ambient light and motion detection
- \_ Remote control interface allowing infrared remote control interaction
- \_ Individual adjustment of the parameters with configuration software
- \_ Power supply via DALI line
- \_ Shutter for preventing movement detection in one direction included
- \_ Small dimensions allowing easy and inconspicuous integration in luminaries
- \_ Wide range of accessories allowing extended application range
- \_ 5 years guarantee

**Housing properties**

- \_ Casing: polycarbonat, black or white
- \_ Type of protection IP20

**Note**

- \_ Tridonic MSensor G3 family sensors are developed according to DALI Standard EN 62386-101 Ed.2, also known as DALI-2. To be able to use the sensor in such installation, an application controller is necessary.
- \_ List of approved application controller can be found on our WEB page in "Downloads" in document "Application\_controllers\_MSensor\_G3.pdf".

**Website**

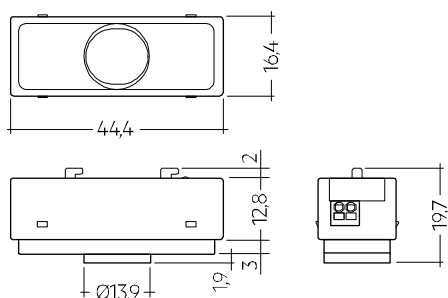
<http://www.tridonic.com/28002384>



**MSensor G3 PIR 5DPI**

DALI-2 multi-sensor

The complete data sheet for this product is available in the Downloads section.

**Ordering data**

Type <sup>①</sup>	Article number	Figure	Colour	Dimensions L x W x H	Packaging, carton	Weight per pc.
MSensor G3 SFI 30 PIR 5DPI WH Luminaire installation	28002384	1	White	44.4 x 16.4 x 19.7 mm	40 pc(s).	0.010 kg

**Technical data**

Supply via	DALI cable
Supply voltage <sup>②</sup>	9.5 – 22.5 V
Current consumption (no LED)	≤ 8 mA
Current consumption (with LED)	≤ 9 mA
Mounting height	5 m
Mounting hole diameter	14.1 mm
Detection angle for PIR detection	84°
Detection angle for light measurement	30° – 60°
Detection range for light measurement <sup>③</sup>	0.5 – 2,000 lx
Min. temperature difference between ambient temperature and detected object	± 4 °C
Ambient temperature ta	-20 ... +50 °C
tc	60 °C
Storage temperature ts	-25 ... +60 °C
Type of protection	IP20
Guarantee	5 Year(s)

**Approval marks****Standards**

EN 61347-2-11, EN 55015, EN 61000-3-2, EN 61000-3-3, EN 61547, EN 62386-101 (DALI-2), EN 62386-103, EN 62386-301, EN 62386-303, EN 62386-304, EN 62386-332

① Uin acc. IEC 62386-101.

② The measured value at the sensor head corresponds to approx. 3 to 6,300 lux on the surface measured.

③ 28002878: bundle incl. 28002384 and 28001872.